

CLA-CON₁₀CU with CLA-CON₁₀FG -C&D

Professional Digital Conference System

Camera Tracking Conference System

Installation & Operating Manual

V 2.0

Important Safety Instructions

- ❖ Read these instructions.
- ❖ Keep these instructions.
- ❖ Heed all warnings.
- ❖ Follow all instructions.
- ❖ The apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
- ❖ The MAINS plug served as a disconnection device, should be easy to operate.
- ❖ The apparatus should be connected to the MAINS socket t-outlet with protective earth.
- ❖ Clean only with dry cloth.
- ❖ Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- ❖ Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- ❖ Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade and the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- ❖ Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- ❖ Only use attachments/accessories specified by the manufacturer.
- ❖ Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- ❖ Unplug this apparatus during lightning storms or when unused for long periods of time.
- ❖ Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen

into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

- ❖ Do not place the equipment on any uneven or unstable stand; original product package or appropriate package should be used to avoid damage caused by strong impacts during transportation.
- ❖ Power supply cords:
- ❖ AC 100 V - 120 V 60 Hz or AC 220 V - 240 V 50 Hz
- ❖ For service, please contact the nearest Service Center.
- ❖ All products are guaranteed for definite time (see the WARRANTY CARD for details) excluding the following cases:
 - A. All damage or malfunction caused by human negligence.
 - B. Damage or malfunction caused by improper operating by operator.
 - C. Parts damage or loss caused by disassembling the product by non-authorized personnel.
- ❖ Use ONLY specified connection cable to connect the system equipment.
- ❖ Upon receipt of the product, please fill out the Warranty Card enclosed and post it to Service Center.



- ❖ TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.

CAUTION: To reduce the risk of electric shock, DO NOT open covers, no user serviceable parts inside. Refer servicing to qualified service personnel only.

CAUTION: DO NOT use alcohol, ammonia or petroleum solvents or abrasive cleaners to clean the devices.



The lightning flash with an arrowhead symbol, with an equilateral triangle, is intended to alert the user to the presence of uninsulated 'dangerous voltage' within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation mark within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: To reduce the risk of fire or electric shock, DO NOT expose units to rain or moisture.



Attention: Installation should be performed by qualified service personnel only in accordance with the National Electrical or applicable local codes.



Power Disconnect: Units with or without ON – OFF switch have power supplied to the unit whenever the power cord is inserted into the power source; however, the unit is operational only when the ON – OFF switch is in the ON position. The power cord is the main power disconnect for all units.

WARNING: The apparatus should be connected to a mains socket outlet with a protective earthing connection.

Contents

Chapter 1: Introduction	1
1.1 Summary	1
1.2 System technology.....	2
1.3 Application software.....	3
1.4 Functions & Features.....	4
Chapter 2: Conference System Controller	6
2.1 Conference System Controller	6
2.1.1 Function & Indication	6
2.1.2 Installation	8
2.1.3 Connection	8
2.1.4 Setting & Operation	10
Chapter 3: Conference Unit	25
3.1 Summary	25
3.1.1 Conference unit	25
3.2 Countertop units	26
3.2.1 Function & Indication	26
3.2.2 Connection	28
Chapter 4: Software setting.....	29
4.1 Summary	29
4.1.1 Software installation and operation.....	29
4.2 Software operation instruction.....	30
4.2.1 Function and indication	30
Chapter 5: System Connection.....	35
5.1 Summary	35
5.1.1 Connection principles	35
5.1.2 Connecting cable of conference unit	35
5.1.3 Extension cable of conference unit	36
5.2 Connection between the controller and the conference unit.....	37
5.3 Connection with camera.....	38
Chapter 6: Working environment and maintenance	39
6.1 Public areas.....	39
6.2 Technical rooms.....	39
6.3 System operator room.....	39

Chapter 7: technical specifications	40
7.1 System specifications	40
7.2 Conference System Controller	41
7.3 Conference System Unit.....	43

Chapter 1: Introduction

1.1 Summary

This series of products is a brand-new intelligent camera tracking digital conference system, which perfectly introduces all-digital technology and integrated network technology into the conference system, and fully combines advanced digital technology, network technology and audio technology. It can be seamlessly connected with smart phone systems, central control systems, videoconferencing systems, and monitoring and fire protection systems, providing a more complete solution for efficient modern conference system engineering.

The "hand in hand" connection technology between the conference units in the system is simple to install and supports cascading functions. The system supports 48 kHz audio sampling frequency, and the frequency response can reach 20 Hz-20 kHz. The system is composed of conference controller, conference unit and application software. Among them, the conference unit has a chairman speaking unit and a representative speaking unit, and the application software is composed of multiple application software modules

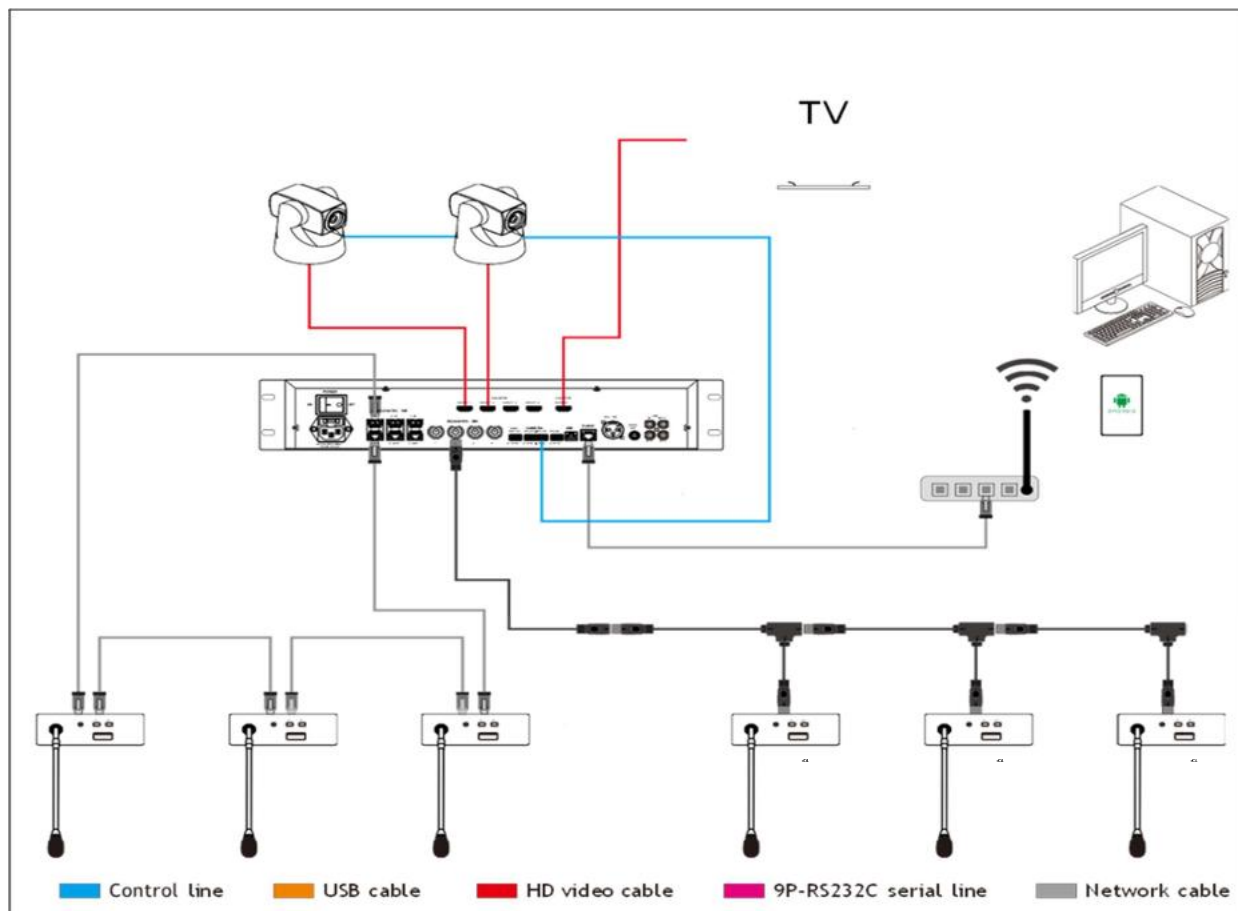


Figure 1.1 System overview

1.2 System technology

1. Conference system controller

The conference system controller is the core equipment of the digital conference system. It supplies power to all conference units and is also the connection and control bridge between the system hardware and the system application software. The conference system controller can operate independently to realize basic conference control functions; in conjunction with the system software, it can realize more powerful management and control. Networked collaborative management, the system controller can set the IP address, has a TCP/IP network interface, can connect to a wireless router, and use computers, mobile phones, tablets and other devices in the same LAN to operate and set the controller, support Android/Windows In operating systems, the distance between the conference system controller and the computer can theoretically be arbitrarily far, which completely breaks through the limitation that the distance between the conference system controller and the computer cannot exceed 15 meters under the traditional RS-232 connection mode, and can realize the conference system Remote control, remote diagnosis and remote upgrade.

The introduction of network technology makes the conference system integrate with the rapidly developing Internet technology, communication technology, and mobile terminal technology, so that it can fully enjoy the convenience brought by modern technology. For example, using wireless local area network technology to wirelessly manage and control the conference system. The introduction of network technology also makes the conference system truly integrated into the entire building intelligent network.

This series of conference systems occupies an 8-core cable or CAT6 network cable. A single cable can transmit high-quality audio signals, control data and data at the same time, and can adapt to the wiring requirements of various venue environments. The professional 8-core T-shaped cable or CAT6 network cable facilitates the installation and disassembly of the system; the "hand in hand" wiring design of the conference unit allows it to be connected at any node of the system, which facilitates the expansion and movement of the system.

2. Conference Unit

The system controller supports a variety of conference units and is equipped with a variety of models according to different needs, ranging from desktop, embedded, speaker, and display conference units. The appearance of the microphone unit is humanized, which is convenient for users' various needs

3. Accessories

Some special accessory equipment is involved in the connection and use of the system, including connecting cables, wiring bases, earphones, video display cards and other equipment.

1.3 Application software

The supporting software of the system is rich and complete, and has the characteristics of simple operation, safety and reliability, and easy maintenance. By The connection line of the system is integrated with all conference system equipment as a whole, and the operator can centrally check the conference system. The system implements all-round control, which simplifies operation and improves efficiency.

The conference system software adopts modular design, including:

1. Unit detection module
2. Proposal management module
3. Conference venue management module
4. Personnel management module
5. Conference control module
6. System control module
7. User management module

1.4 Functions and Features

1. Discussion function microphone settings

■ 5 "speaking modes" can be set:

- ◆ "FIFO": If the maximal number (1-8) of active delegate microphones has been reached and if another delegate unit is activated, the delegate unit switched on first will be switched off first automatically
- ◆ "LIMIT": If the maximal number of active microphones, previously fixed, has been reached, delegates requesting to speak join a request-to-speak list. The first unit joining the list will become active when the active unit gets off.
- ◆ "FREE": Allows up to 20 delegate speech units to be turned on at the same time, and is not limited by the "Speak Number"
- ◆ "APPLY": When the delegate presses the microphone ON/OFF button to request to speak, the chairman unit can approve or reject his/her request.
- ◆ "VOICE": The delegate's microphone is activated when spoken into.

■ The number of speakers can be set from "1-8".

■ Two "speaking time modes" can be set:

- ◆ "Timer mode" mode, you can set "0-999" seconds, the microphone will automatically turn off when the set time is reached.
- ◆ "Auto mode" mode, you can set "0-999" seconds, after the set time, if the microphone does not speak within the set time, the microphone will automatically shut down.

2. The number of chairman units is not limited and supports extended functions

- The number of chairman units is unlimited. The main unit supports extended functions and supports up to 1200 microphones at the same time, which meets the requirements of the international conference program.

3. Camera automatic tracking function

- Equipped with "SONY VISCA, PELCO P, PELCO D" communication protocol cameras can realize automatic tracking function and can record and record the panorama of the venue and speakers.

4. Comprehensive meeting management

- Conference office automation, arrange routine and tedious work in an orderly manner, process and release various information and data in the most timely manner.
- Provides comprehensive control functions on the venue environment, meeting progress, and delegate arrangements.

5. Full remote control, remote diagnosis and remote upgrade

- Networked collaborative management, the system controller can set the IP address, has a TCP/IP network interface, can be connected to a wireless router, and use computers, mobile phones, tablets and other devices in the same LAN to operate and set the controller, support Apple iOS/Android/Windows systems.

6. Seamless connection with central control system

- The conference system is seamlessly connected with most Intelligent central control systems, thus forming a complete conference system solution, which not only has basic conference functions, but also comprehensively manages the multimedia peripheral equipment, ambient lighting, projection display and Sound system, etc.

7. Perfect anti-radio frequency interference performance (such as mobile phones)

- The anti-interference circuit design prevents all mobile phone signal interference.

8. Multi-room configuration function

- Multiple conference system controllers can be used as independent conference systems or can be easily expanded to form a large-scale conference system. By setting the working mode of the mainframe as master mode or slave mode, flexible multi-room configuration functions can be realized.

Chapter 2 Conference System Controller

The main unit of the conference system is the core equipment of the digital conference system. It supplies power to all conference units and is also the connection and control bridge between system hardware and system application software. The conference system controller can run independently to realize basic conference control functions; with the system software, it can realize more powerful management and control.

The conference system controller can connect up to 100 speaking units. If you need to connect more speaking units, You can connect to an expansion controller

Product model:

CLA-CON10CU-PLUS

Camera tracking digital conference system controller (Discussing, Camera tracking)

2.1 conference system controller

2.1.1 Function and Indication

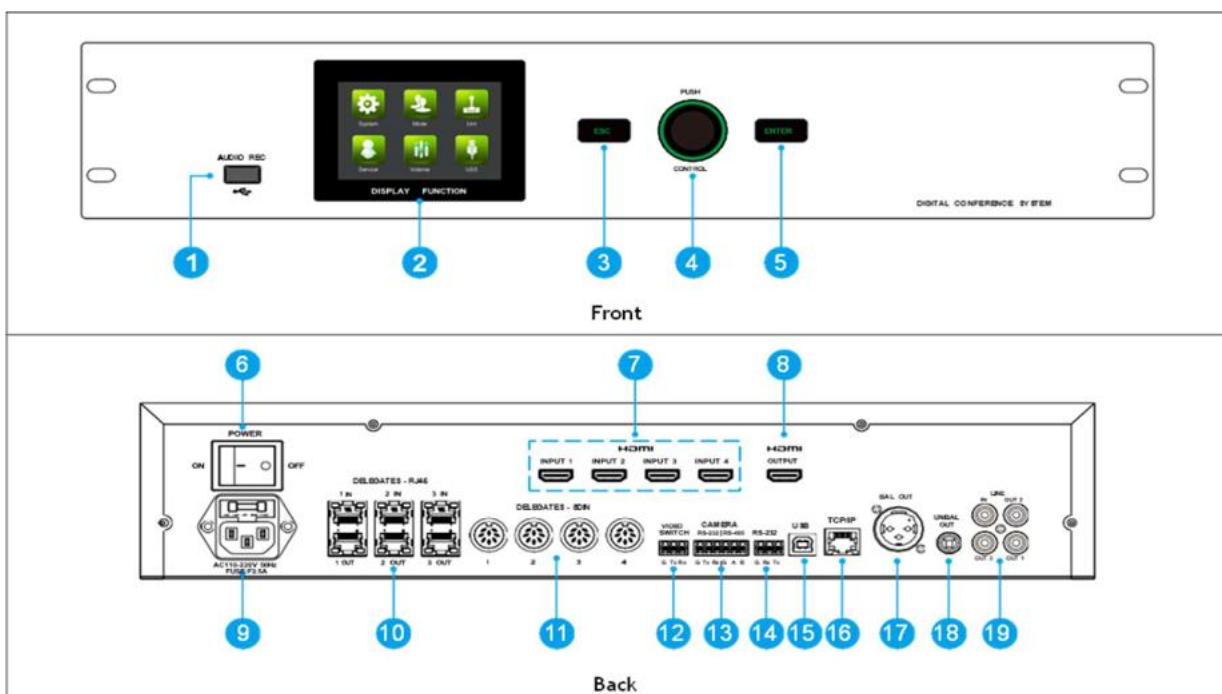


Figure 2.1 Front and rear panels

2.1 conference system controller

2.1.1.1 Front panel


1. USB recording output port
2. HD 3.5-inch IPS TFT
3. Button-ESC
4. Shuttle knob
5. Button-Enter

2.1.1.2 Rear panel

6. Power switch
7. HDMI input port 1-4 (optional)
8. HDMI output port (optional)
9. Power input interface (use a three-pin grounding plug)
10. Conference unit interface (RJ45, 3 groups in total, divided into input and output)
11. Conference unit interface (8 cores, 4 channels in total)
12. HD video 232 switcher interface (Phoenix plug interface)
13. Camera 232 communication interface, 485 communication interface (Phoenix plug interface)
14. Central control system 232 interface (Phoenix plug interface)
15. USB local communication connection interface
16. Ethernet interface
The host computer and PC or Android and Apple mobile terminals use TCP/IP protocol to communicate through the Ethernet interface, so that PC or mobile terminal control system
17. Original sound channel line output interface (3-pin XLR balanced output)
18. Original sound channel line output interface (6.3mm jack/unbalanced input)
19. Background music audio input port
(RCAx1) Audio output port (RCAx3)

2.1.2 Installation

The conference system controller can be installed on a standard 19-inch cabinet. There are two screw holes on each side of the controller panel. Use snailsFix the four holes **1** with the wire.

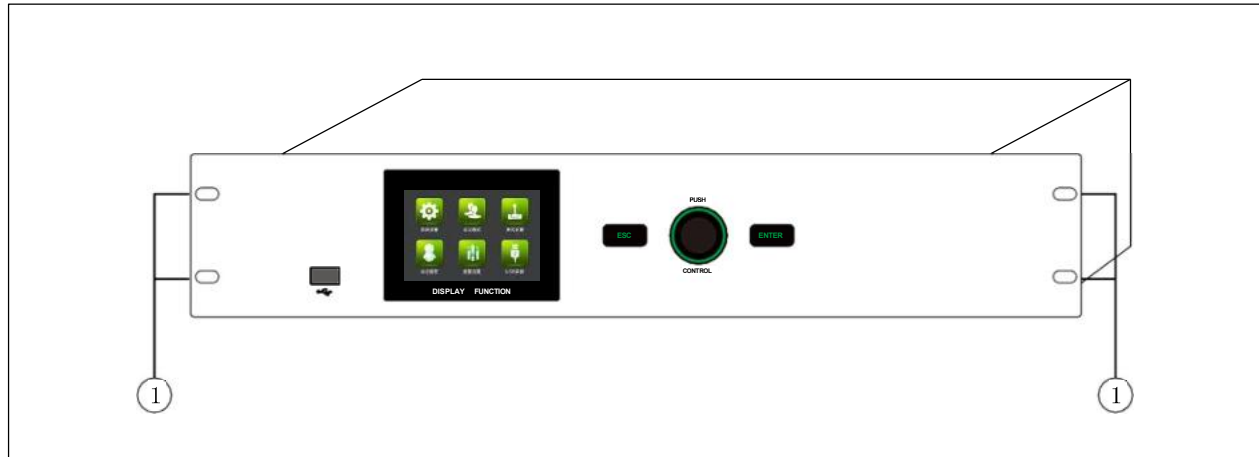

2.1.3 Connection

2.1.3.1 Connection with conference unit

The conference system controller has 4 groups of 8 RJ45 microphone unit interfaces and four 8P-DIN conference unit output interfaces. The system comes with a male standard cable (RJ or 8P-DIN interface) and the corresponding connection line delivered with the base.

When the controller is connected to the conference unit, just connect the RJ interface network cable or 8P-DIN male connector of the first conference unit to the output interface of the controller.

When the main unit is far away from the conference unit, it is recommended to use an 8P-DIN extension cable. Both ends of the cable are 8P-DIN male and 8P-DIN female. Connect the 8P-DIN female end of the extension cable with the standard 8P-DIN male end cable or T-shaped connecting wire that comes with the conference unit. Then connect the 8P-DIN male end of the extension cable to the output interface of the controller.

2.1.3.2 Connection with auxiliary equipment

The system controller has diversified auxiliary equipment interfaces, and with different auxiliary equipment, it can realize the input and output of signal and audio signals.

2.1.3.3 Expansion connection with conference controller

By connecting the expansion controller, the system can connect up to 1000 speaking units, as shown in Figure 2.4

2.1.3 Connection

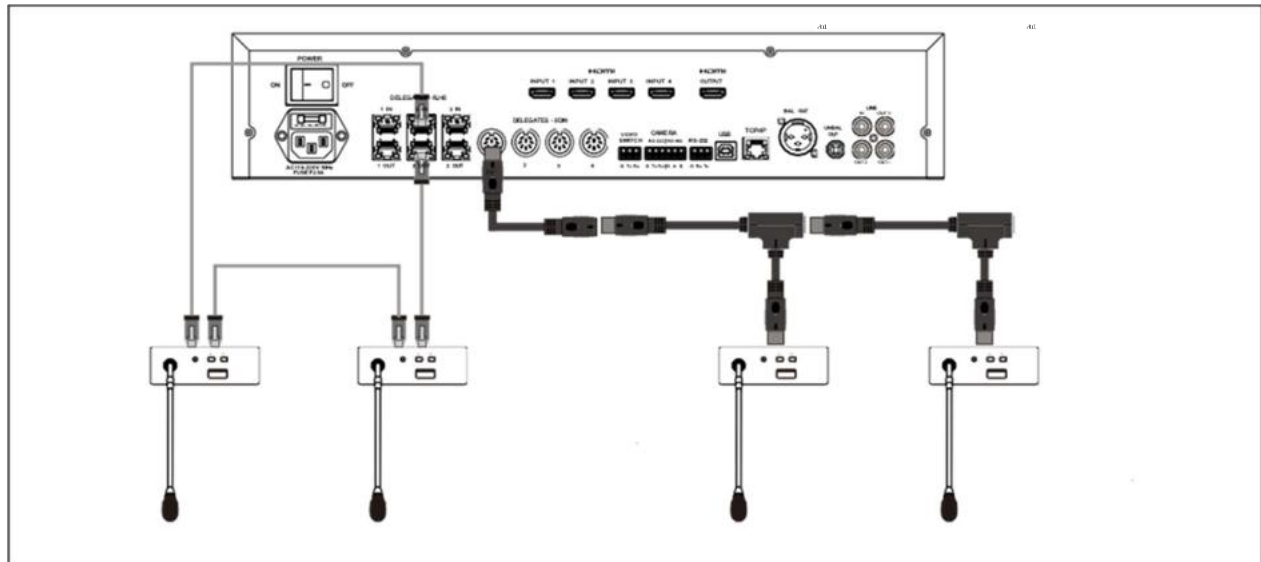


Figure 2.3 The connection between controller and unit

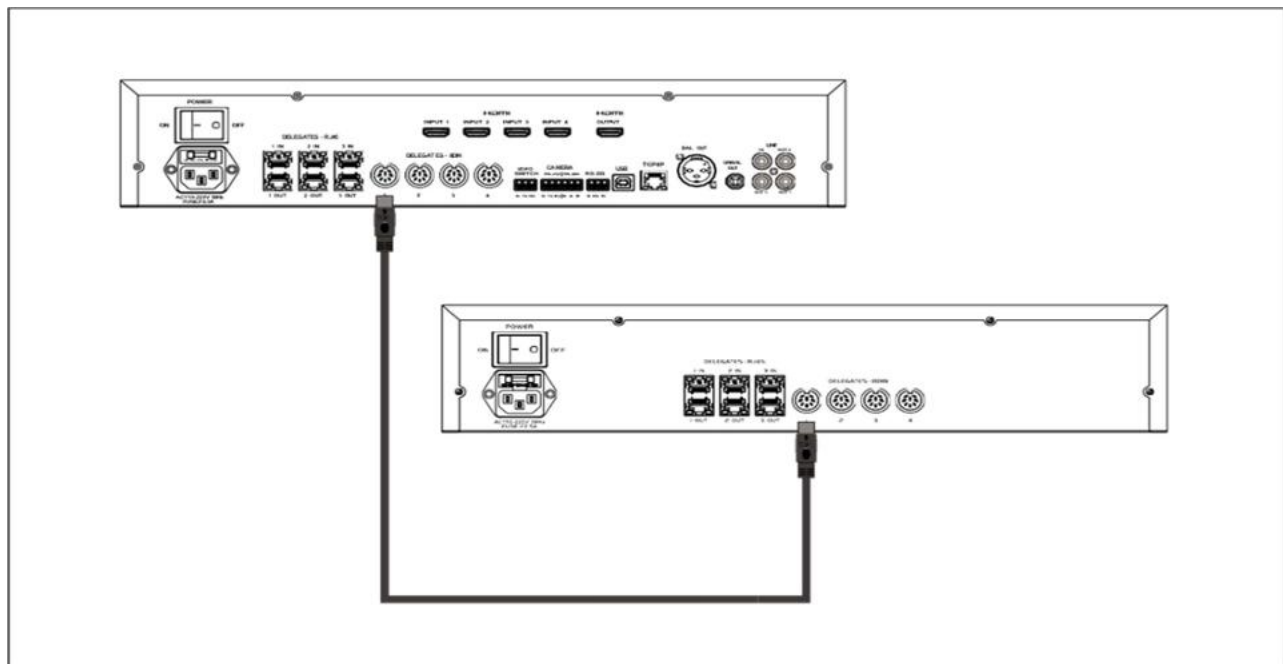


Figure 2.4 The connection of extended controller

2.1.4 Setting and operation

After completing the system installation and connection, you need to set up the conference system controller before the conference starts. The controller menu structure is shown in the figure below:

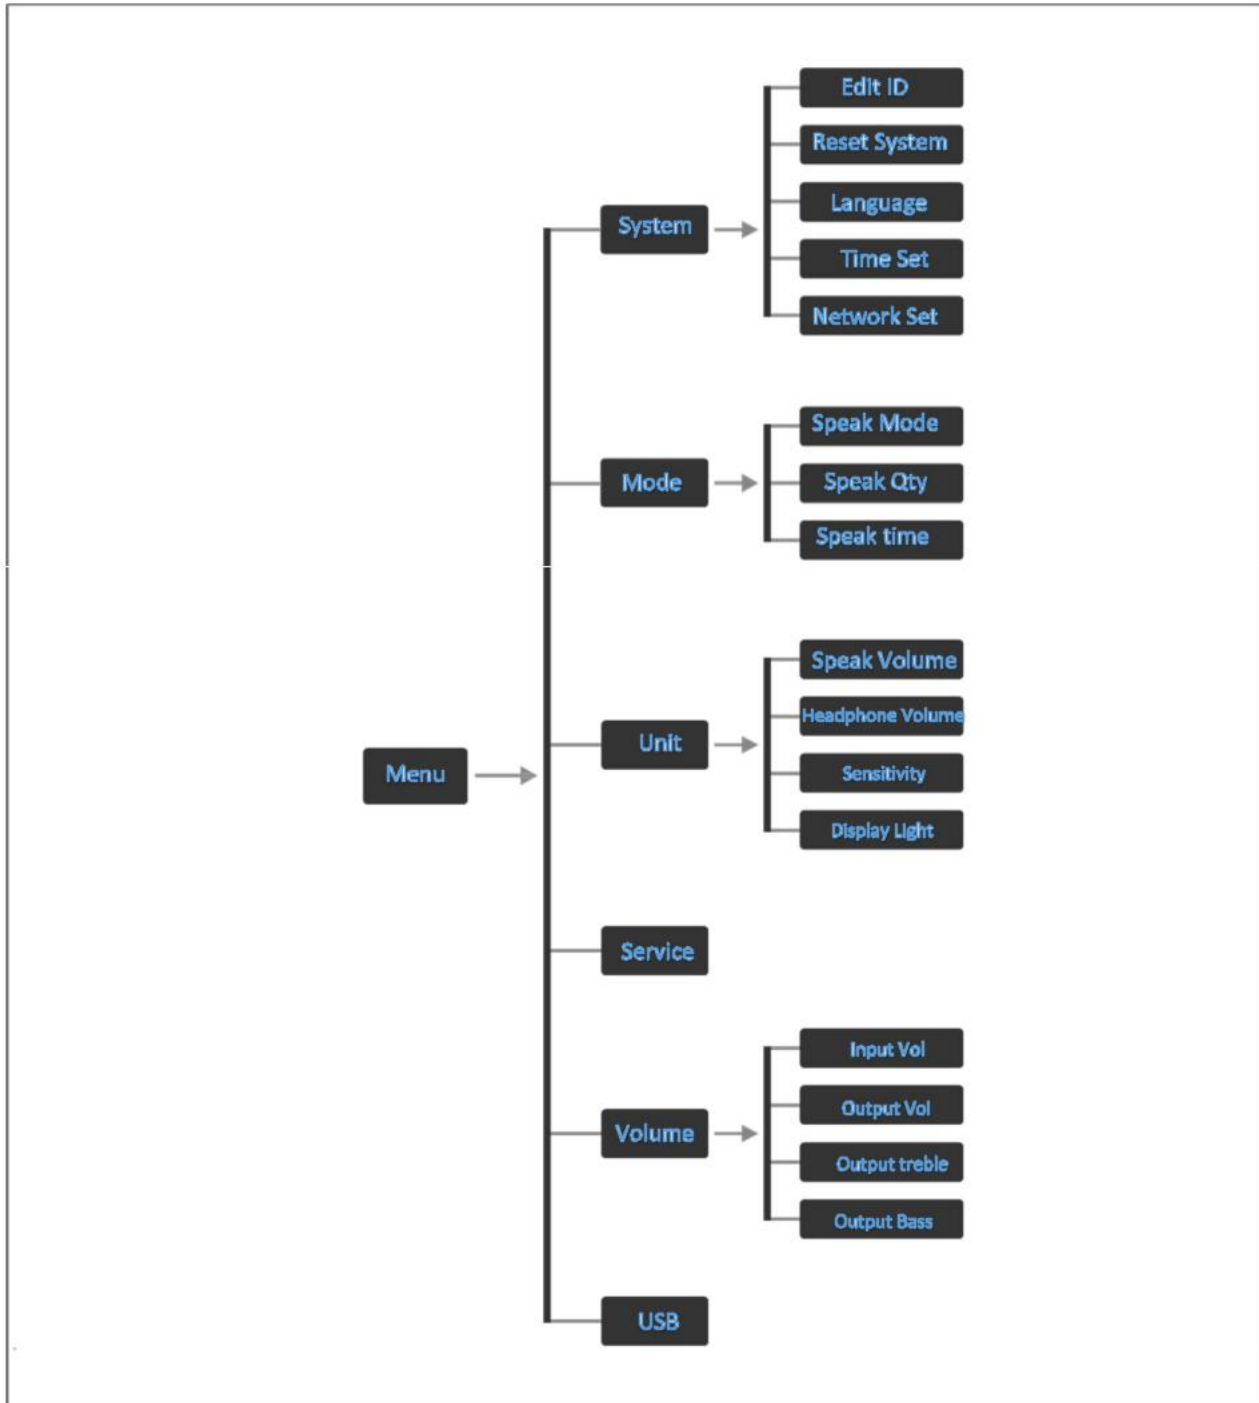


Figure 2.5 Menu of controller


A. Power on initialization

After connecting, press the power switch and the controller will enter the boot screen, as shown in Figure 2.6.1



Figure 2.6.1

After 2 seconds, it will automatically enter the standby mode, Swipe the screen to enter the main interface, as

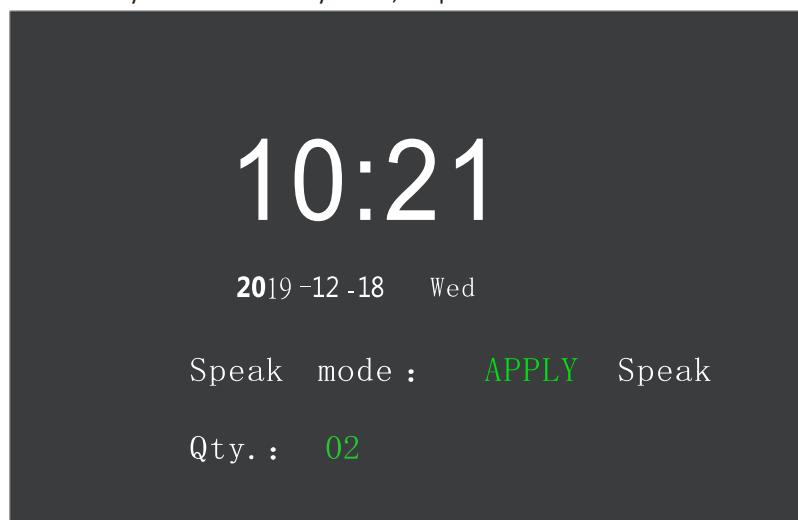

shown in Figure 2.6.2:



Figure 2.6.2

2.1.4.1 System Setting

Press the "System Setting" icon to enter the system settings menu, as shown in Figure 2.6.3

Edit ID	ENTER
Reset System	ENTER
Language	ENGLISH
	Time Set Date Time
10:21:36	Date 2020-12-18
	Network Set Local
IP	192:168:001:100
Remote IP	192:168:001:001
Netmask	255:255:255:000
Gateway	192:168:001:001

Figure 2.6.3

1. Edit ID

Press the "Edit ID" icon to enter the edit unit ID menu, as shown in Figure 2.6.4


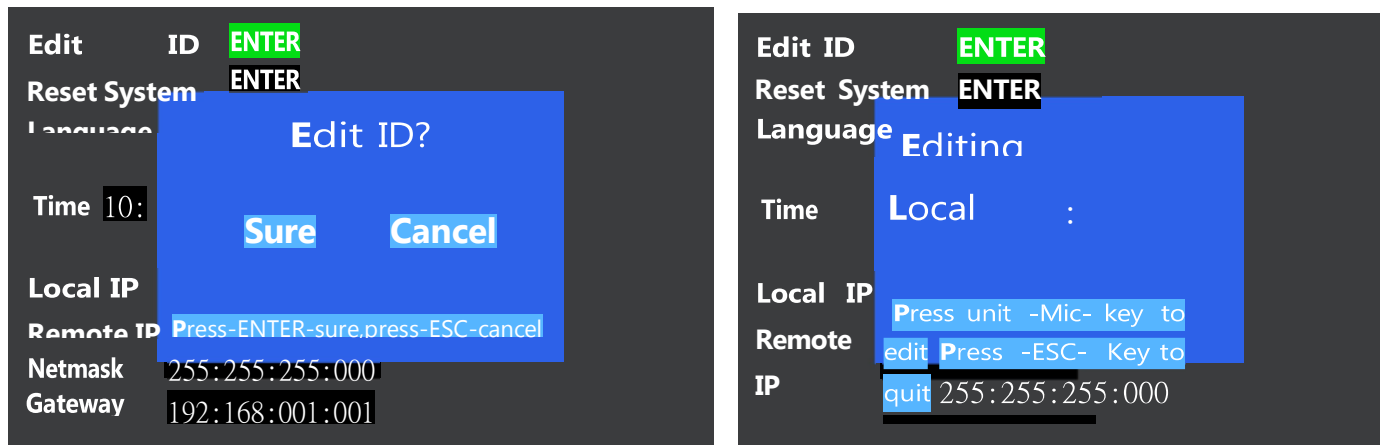


Figure 2.6.4

When the controller is connected to the speaking unit, you need to edit the ID for the first time. Click "Start", and then press the microphone speaking button of all units. After the editing is successful, the current ID will be displayed on the display of the unit. You only need to edit the ID once., ID number is automatically saved in the unit.

2. Network Setting

Set the Local IP, remote IP, netmask, etc. to realize the mobile device control system, as shown in Figure 2.6.5

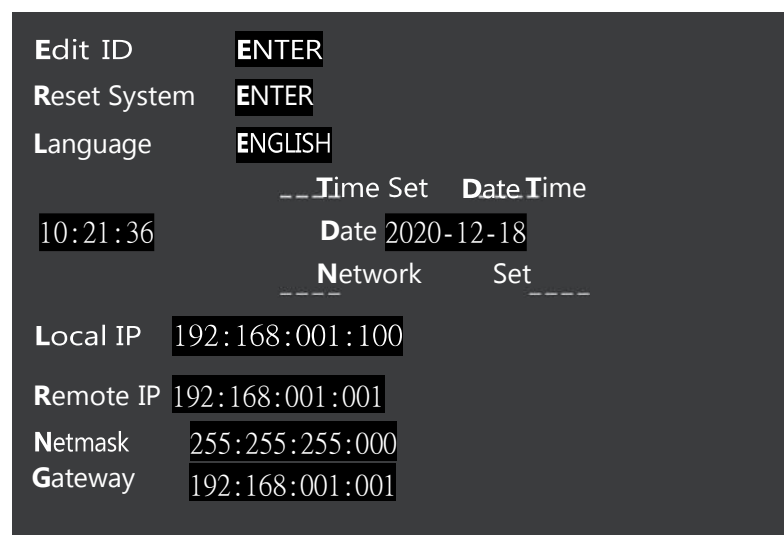

"Local IP": - It is a unified address format provided by the IP protocol. It assigns a logical address to each network and each host on the Internet to shield the difference in physical addresses. System PC software or WEB The IP address of the login interface must be consistent with the host setting before you can log in and use it.

"Remote IP": - Refers to the IP of the communication control equipment in the same local area network, such as the IP of a computer

"Netmask": - Indicate which bits of an IP address identify the subnet where the controller is located and which bits identify the bit mask of the host. The subnet mask cannot exist alone; it must be used in conjunction with the IP address. The subnet mask has only one function, which is to divide an IP address into two parts, the network address and the host address.

"Gateway": - A distributed database on the Internet that maps domain names and IP addresses to each other, enabling users to access the Internet more conveniently. Through the host name, the process of finally obtaining the IP address corresponding to the host name is called domain name resolution.

"Network Status": Display the current connection status between the device and the network.

3. Time setting

Set the date and time of the current system. After setting up, it will automatically synchronize the date and time of the speaking unit, as shown in Figure 2.6.6

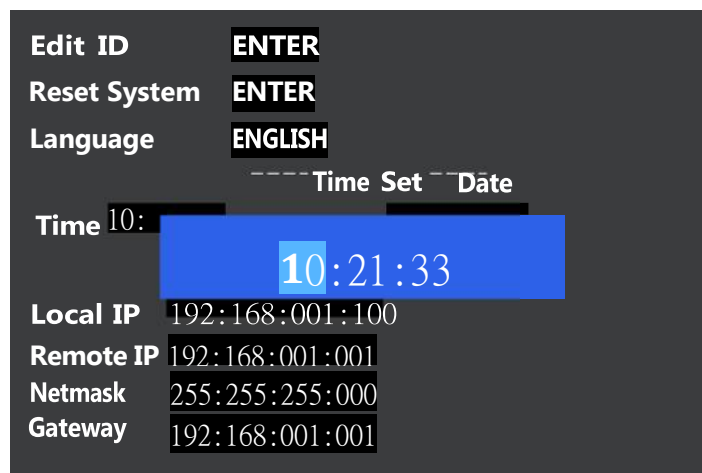


Figure 2.6.6

4. Resume Factory Setting

If the system cannot be used normally due to the disorder of the setting data, the data can be cleared by restoring the factory settings, as shown in Figure 2.6.7


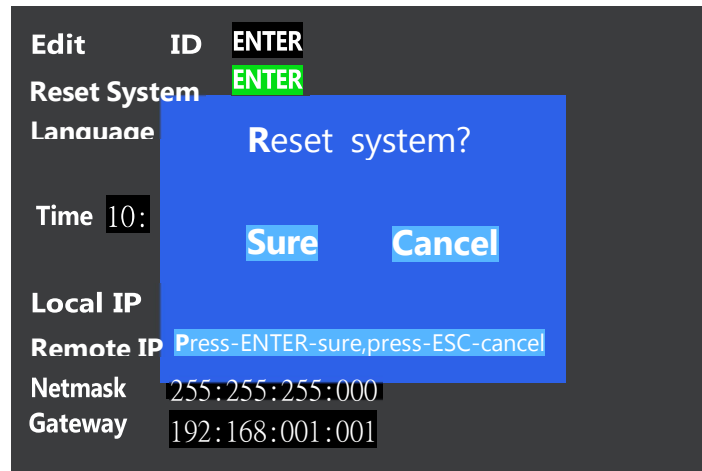


Figure 2.6.7

2.1.4.2 Meeting mode

Press the "Mode" icon to enter the conference mode setting menu, as shown in Figure 2.7.0

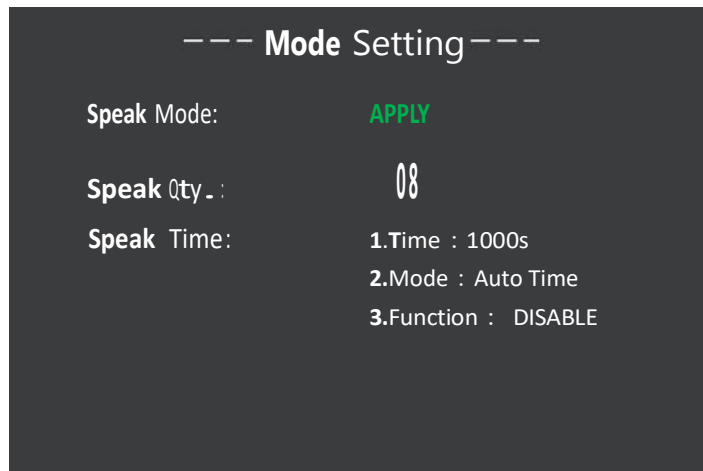

1. Speak Mode

Set the mode of microphone unit speaking on and off

“FIFO”: - If the maximal number (1-8) of active delegate microphones has been reached and if another delegate unit is activated, the delegate unit switched on first will be switched off first automatically.

“LIMIT”: - If the maximal number of active microphones, previously fixed, has been reached, delegates requesting to speak join a request-to-speak list. The first unit joining the list will become active when the active unit gets off.

“FREE”: - Allows up to 20 delegate speech units to be turned on at the same time, and is not limited by the “Speak Number”

“APPLY”: - When the delegate presses the microphone ON/OFF button to request to speak, the chairman unit can approve or reject his/her request.

“VOICE”: - The delegate's microphone is activated when spoken into.

2. Speak Number

Select the maximal number of delegate units that can be turned on at the same time: 1-8;
Chairman unit is not limited by the “Speak Number”.



Figure 2.7.1

3. Speak Time

Set the speaking time of the microphone unit, divided into timing mode and automatic mode,
and be choose to disable.



"Limit Time": - "0-999" seconds can be set, and the microphone will automatically turn off after the set time is reached.

"Auto Time": - "0-999" seconds can be set. After the set time, if the microphone does not speak within the set time, the microphone will automatically turn off.

2.1.4.3 Unit Setting

Press the "Unit " icon to enter the unit setting menu, as shown in Figure 2.7.3 and 2.7.4

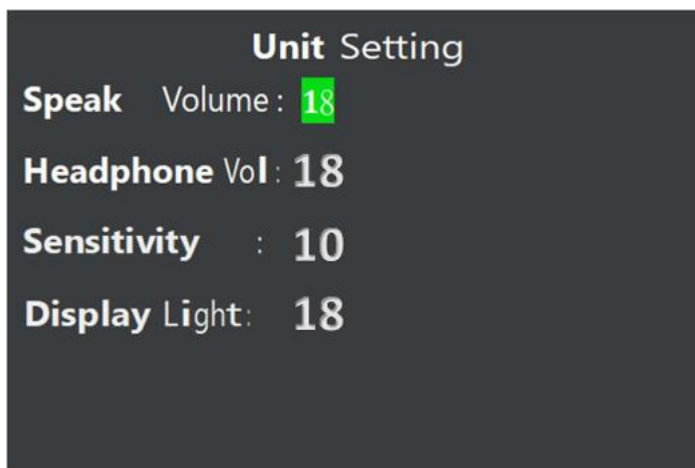


Figure 2.7.3

Figure 2.7.4

"Headphone Vol": - Adjust the volume of the headphone or speaker of the speaking unit, the setting range is 0-20.

"Speak Vol": - Adjust the volume of the microphone of the speaking unit, the setting range is 0-20.

"Display Light": - Adjust the brightness of the display screen of the speaking unit, the setting range is 0-20.

"Voice Ctrl Val": - In the voice control mode, adjust the sensitivity of the microphone that activates the speaking unit, and the setting range is 0-20.

"Lock Speak Vol": - Press this key to lock the speaking volume of the speaking unit microphone



"Lock Unit EQ": - Press this key to lock the balance setting of the speaking unit microphone.

"Reset Unit EQ": - Press this key to restore the balance of the speaking unit microphone to the default setting.

1.1.4.5 Service

Press the "Service" icon to enter the service menu, as shown in Figure 2.7.7

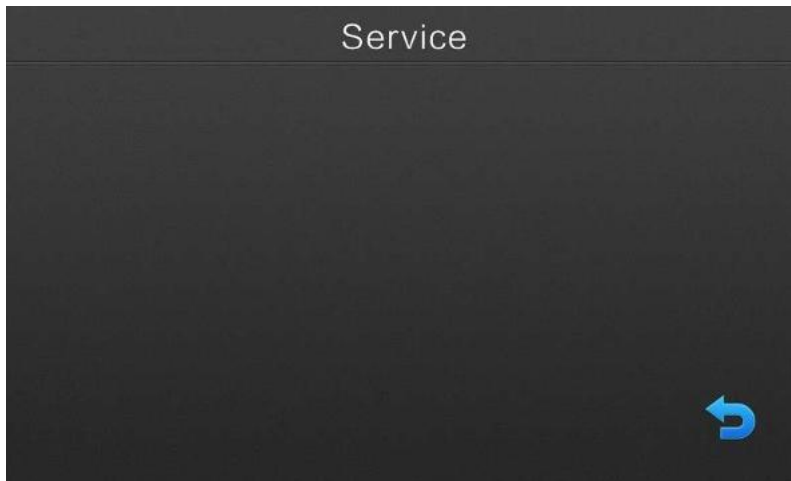


Figure 2.7.7

If there is a speaking unit applying for service, this interface will pop up and prompt the service requirements of the applying unit, as shown in Figure 2.7.8

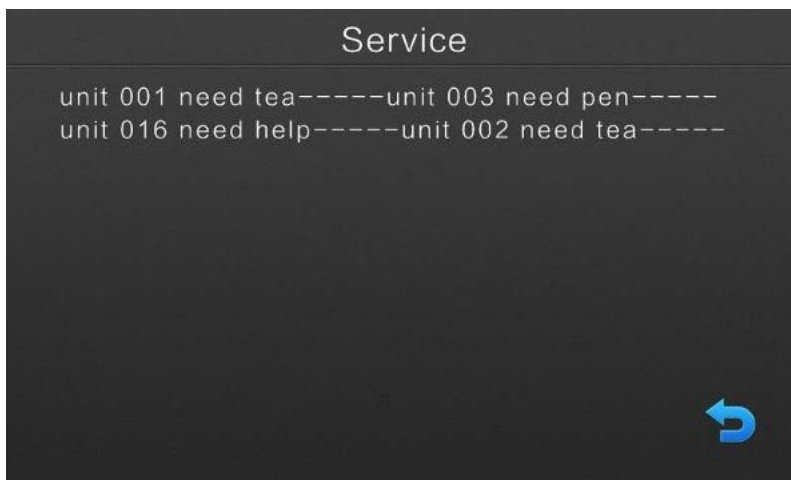


Figure 2.7.8

If the requested unit cancels the service, the above request will automatically disappear

1. Introduction to parameters

"Disable": - After pressing, the audio will not be processed. Without pressing, the audio is processed.

"Reset": - Restore the EQ to factory settings.

"Mode": - Provide 3 default preset modes (Fullness, Dynamic, Voice) and one custom mode.

1.1.4.6 Volume Setting

Press the "Volume" icon to enter the Volume setting menu, as shown in Figure 2.8.0

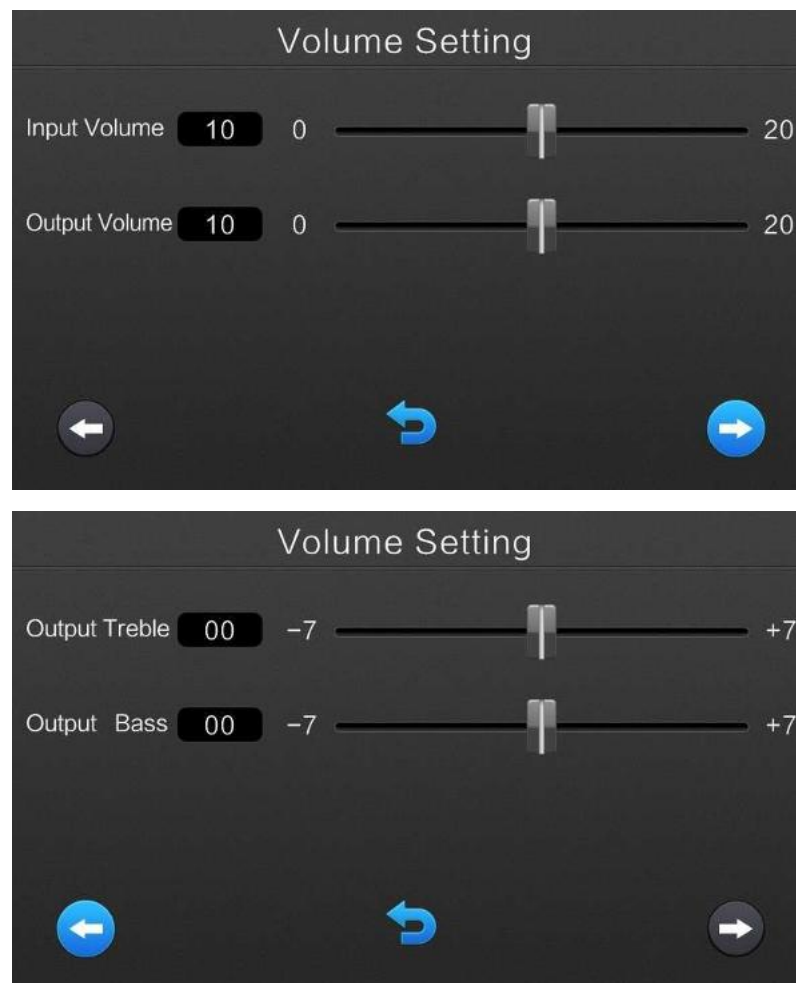


Figure 2.8.0

Input Volume: - Set the input volume of the controller audio input interface, with an adjustment range of 0-20.

Output Volume: - Set the output volume of the controller audio output interface, with an adjustment range of 0-20.

Output Treble: - Adjust the treble of the controller audio from -7 to+7.

Output Bass: - Adjust the bass of the controller audio from -7 to+7.

2.1.4.8 USB recording

Press the "USB" icon to enter the USB recording menu, as shown in Figure 2.8.1

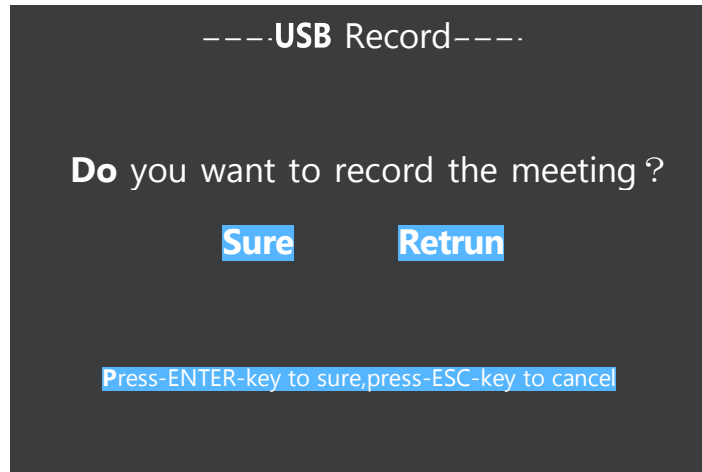


Figure 2.8.1

1. Operation

- a. Insert the USB flash disk on the front panel of the controller
- b. Click the "START" button in the USB recording menu, and the original red stop button will turn into a recording state icon at this time
- c. After the meeting is over, press the "STOP " button to stop recording. At this time, the system will automatically save the recording file on the U disk, and the audio file format is WMA

Chapter 3 Conference Unit

1.1 Summary

Conference unit is the common name to describe the units used by the attendees to contribute to a conference. The term includes discussion unit (chairman/delegate). Various features are available for the attendee, depending on the type of speaking unit operated: listen, speak, request to speak, information display etc.

1.1.1 Conference unit

Conference unit provides speaking function.

Microphone and loudspeaker are the basic components.

Conference unit includes chairman unit, delegate unit.

Conference unit are available as foldaway, tabletop, flush-mounted, depending on the method of installation and the appearance wanted by the user. This choice greatly enriches the diversification requirements by all kinds of users.

Product model:

CLA- CON10CU Series:

CLA-CON10FG -C

Camera tracking conference system chairman unit
(Mechanical buttons)

CLA-CON10FG -D

Camera tracking conference system delegate unit
(Mechanical buttons)

1.2 Flushmount units

1.2.1 Function and indication

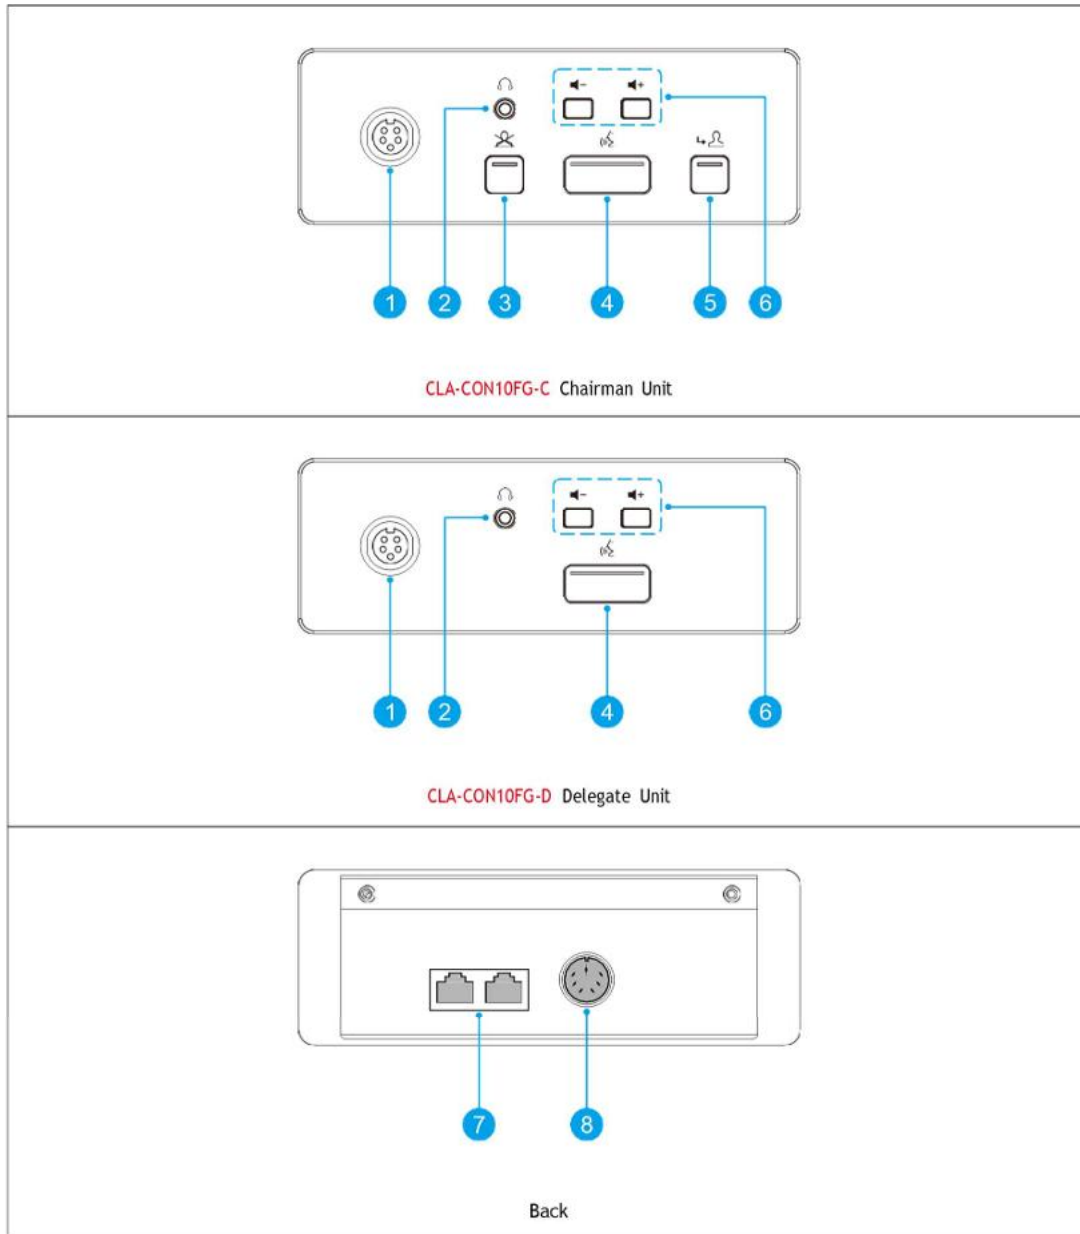


Figure 3.0 Fushmount unit

3.2 Flushmount units

1.1.1.1 Front

1. Dismountable microphone socket
2. Earphone jack (Ø3.5 mmX1)
3. Priority key (chairman unit)
 - All active delegate microphones will be turned off when this key is pressed.
 - All active delegate microphones will be muted temporarily when this key is Long pressed
4. Microphone On/Off key with indicating light (for the chairman unit)
Microphone On/Off/request key with indicating light (for the delegate unit)
 - Chairman unit: press this key to activate/deactivate the microphone.
 - Delegate unit: press this key to activate/deactivate the microphone or request/cancel request to speak.
5. Chairman approve speech button (chairman unit)
6. Multi-function buttons
The buttons have the following functions:
 - a. Earphone volume reduction/ 
 - b. Earphone volume plus/ 

1.1.1.2 Back

7. RJ45x2 network cable interface.

1.1.1 Connection

1.1.1.1 Connection with the controller

The conference system controller has 3 groups of 6 RJ45 microphone unit interfaces and 4 8P-DIN conference unit interfaces. The system comes with a male standard cable (RJ or 8P-DIN interface) and the corresponding connection line delivered with the base. When the controller is connected to the conference unit, just connect the RJ interface network cable or 8P-DIN male connector of the first conference unit to the output interface of the host.

When the main unit is far away from the controller, it is recommended to use an 8P-DIN extension cable. Both ends of the cable are 8P-DIN male and 8P-DIN female. Connect the 8P-DIN female end of the extension cable with the 8P-DIN male standard cable or T-shaped connecting line of the conference unit. Then connect the 8P-DIN male end of the extension cable to the output interface of the controller.

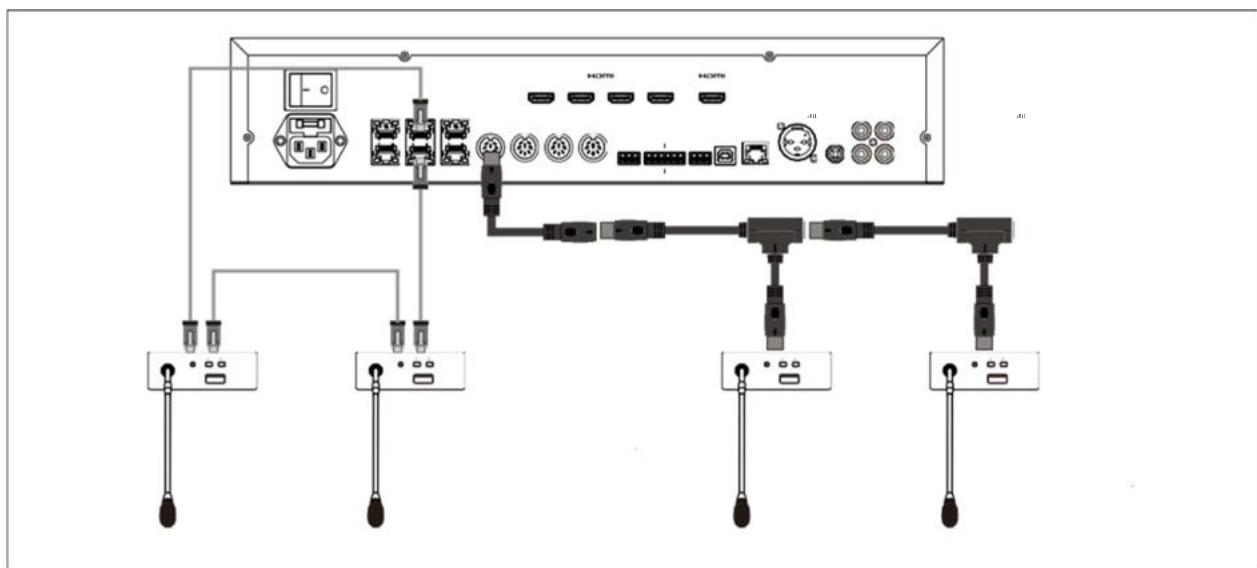


Figure 3.2 The connection between the conference controller and the unit

1.1.1.1 Connection between conference units


This series of conference units adopts a hand-in-hand connection method, which makes the installation of all systems simple and quick.

Rj45 unit: Connect two network cables and connect them in a hand-in-hand manner.

1.2.1.1 External earphones

An external earphone can be connected to the external earphone jack of the conference unit. Its volume

can be adjusted by the earphone volume control button. The external earphone shall have a Ø 3.5 mm plug, as in the following figure:

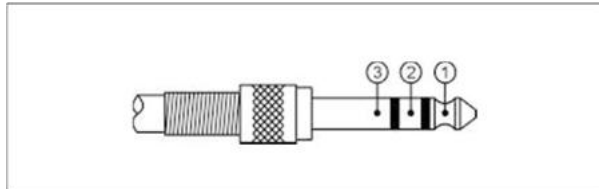

Functions and indications:

- 1 Left stereo channel signal
- 2 Right stereo channel signal
- 3 Power ground/Shield

Chapter 4 Software setting

4.1 Summary

The controller of the conference system can be connected to the PC through a USB cable or TCP/IP, and the system can be set up through software (system settings and video settings)

4.1.1 Software installation and operation

4.1.1.1 Software installation

Unzip the CD-ROM compressed package to the local hard disk, double-click "setup" to install (install in any directory), double-click to install (install in any directory).

4.1.1.2 Software running

After the installation is complete, connect the controller and the computer by the USB cable (when using TCP/IP, please connect the controller with the local router first), turn on the power of the controller, and then double-click to run the "Digital CS V2.0" on the desktop of your PC to enter the software login Interface, select "Serial port" (for TCP/IP connection, please select "IP Connection" and fill in the IP and port data consistent with the conference controller settings), As shown in Figure 4.0.

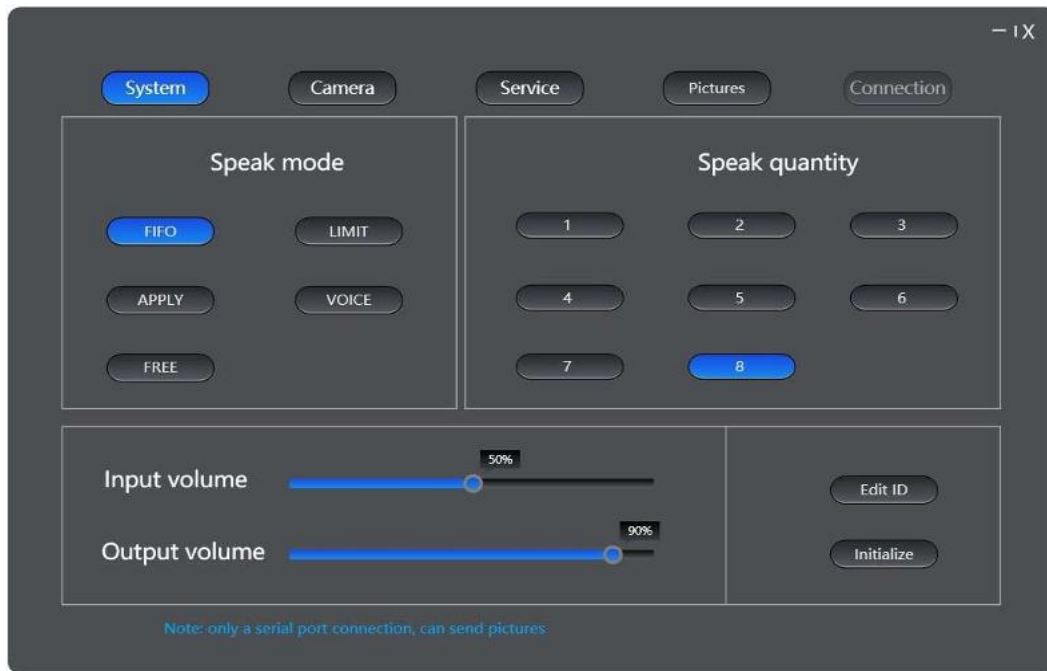


Figure 4.0

4.2 Software operation instruction

4.2.1 Function and indication

4.2.1.1 System Settings

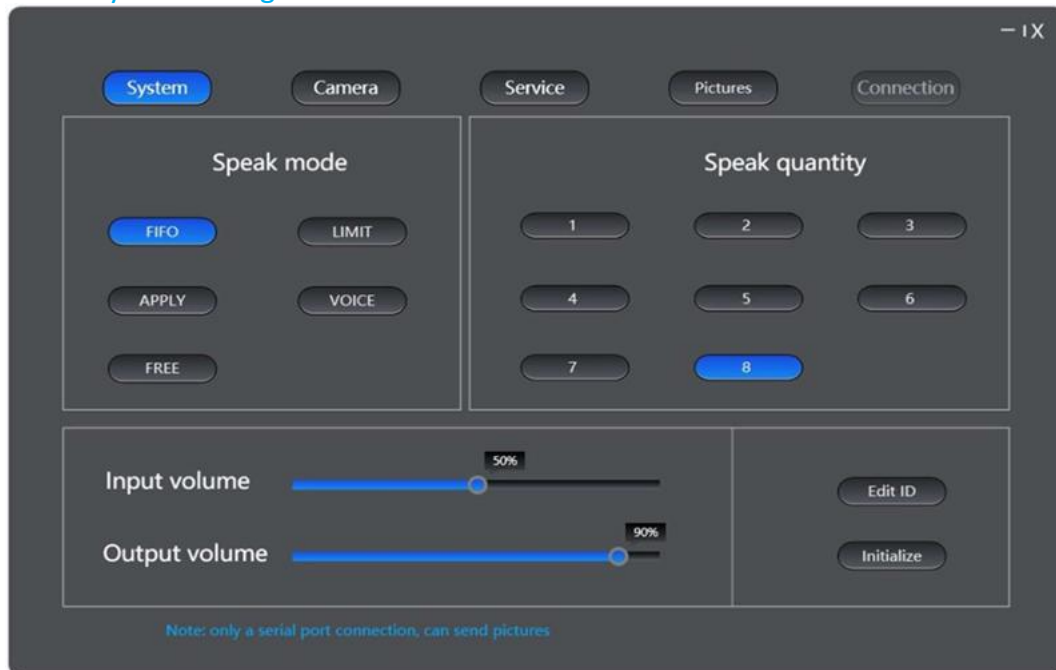


Figure 4.1 System

Set parameters such as "Speak Mode", "Speak Quantity", "Input Volume", "Output Volume", "Edit ID", and "Initialize", as shown in Figure 4.1

4.2.1.2 Camera Setting

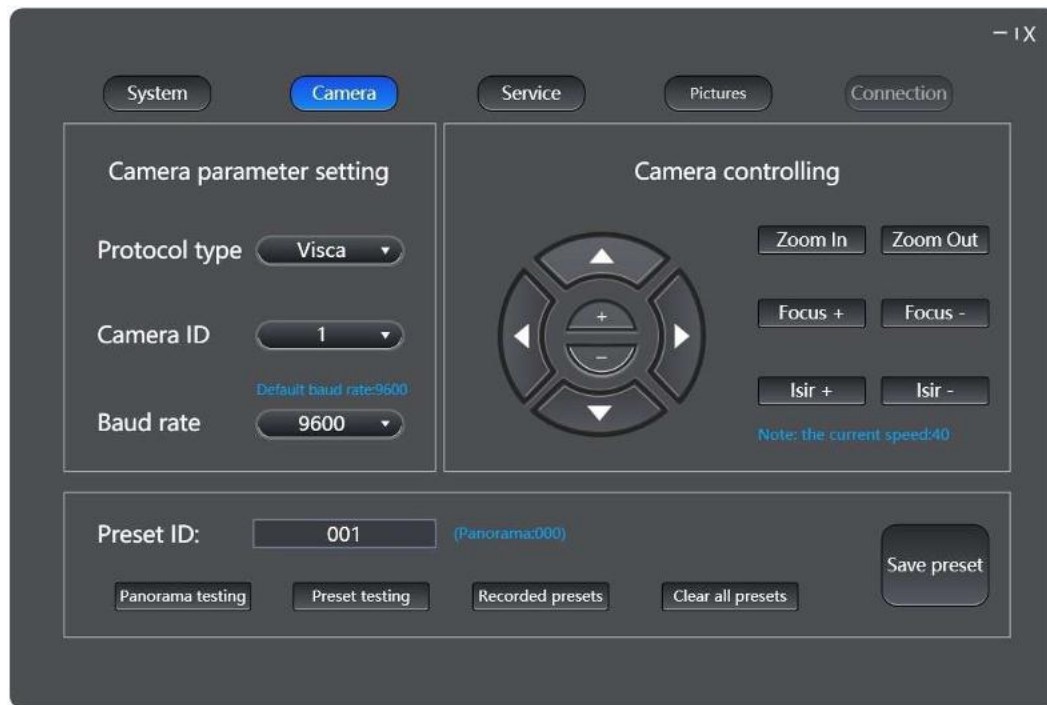


Figure 4.2 Camera Tracking

1. Camera parameter setting

a. Protocol type

Description: Set the communication protocol between the controller and the camera. There are three protocols: VISCA, PELCO-D, and PELCO-D. Before controlling the camera, first select the same protocol as the camera.

b. Camera ID

Description: Set the ID of the current camera to be controlled. When using multiple cameras, the camera itself needs to be set with different ID. The code "1" means to control the first camera, and so on.

c. Baud rate

Description: Set the communication baud rate between the controller and the camera. There are three baud rates 19200, 9600, 4800, 2400. Before controlling the camera, first select the same baud rate as the camera.

4.2.1.2 Camera Setting

2. Preset setting

a. Preset ID

Description: "000" represents the panoramic address code of the camera "001-999" represents the address code of the microphone

b. Save preset

Description: After setting the camera position, press to save the preset

c. Panorama testing

Description: After pressing, the camera will automatically rotate to the set panoramic position for shooting

d. Preset testing

Description: After pressing, the camera will automatically rotate to the preset position that has been set for the preset point to shoot

e. Clear all presets

Description: Press to clear all preset points that have been set.

4.2.1.3 Service

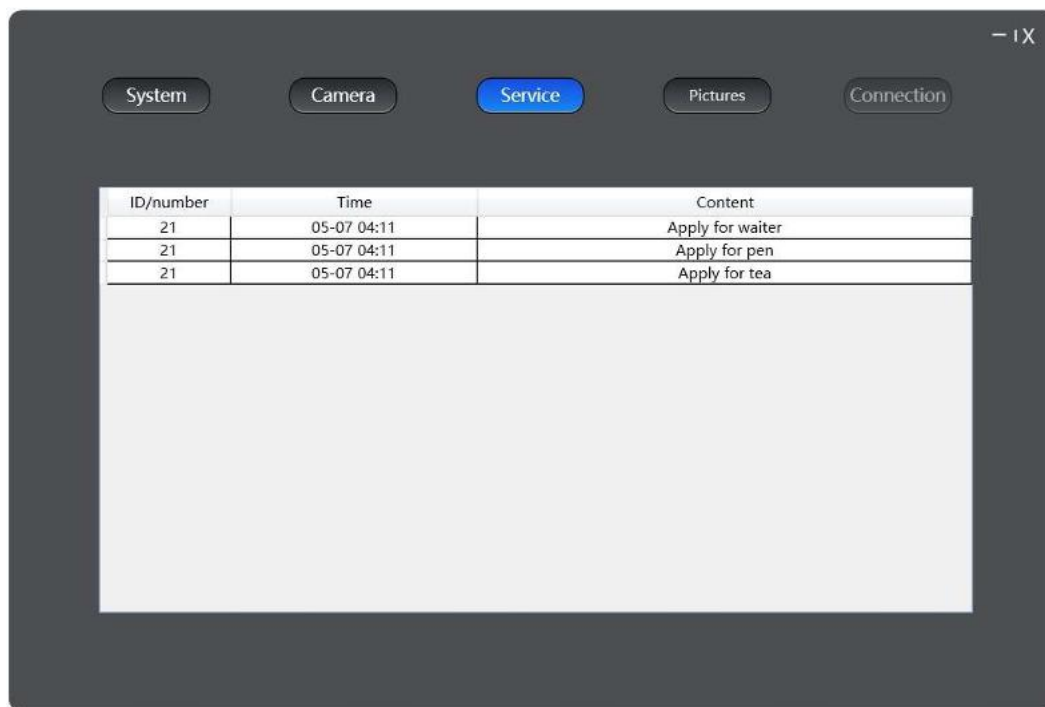


Figure 4.3 Conference Services

The service details of online unit application can be displayed immediately

4.2.1.4 Picture

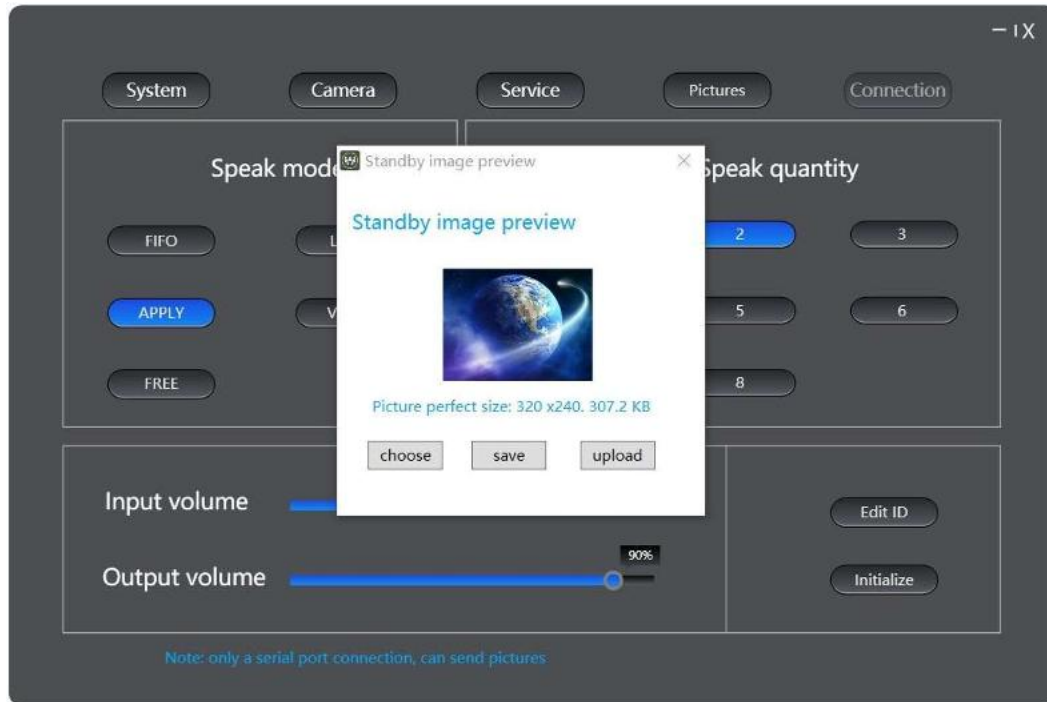


Figure 4.4 Picture Upload

The standby screen of the microphone unit can be set (only applicable to the conference unit with color screen without touch).

Chapter 5 System Connection

4.1 Summary

This conference system has a simple and reasonable structure with high extendibility in hardware. The system installation is simple and quick and does not need special training. Hand-in-hand connection is adopted between conference units as well as to controller via dedicated 8PIN cable or Rj45 cable.

TCP/IP protocol is adopted for Ethernet connection between the controller and the PC. As a result, remote control, remote diagnosis and remote update can be achieved. Application software for clients and servers can run on one computer or on different computers in the same LAN. The operator is able to control the progress of the meeting flexibly.

In this chapter, the connections are introduced by diagrams and examples.

4.1.1 Connection principles

The system power is provided by controller for all the conference units. Thus, the total number of system units in any installation is limited by the maximum power handling capacity and control capacity of the controller. the controller has 3 groups of 6-channel Rj4 5 microphone unit interfaces, adopts closed-loop Ethernet link mode, supports bilateral power supply of microphone units, and supports hot-swappable microphone units. Each channel supports 20 network port units, which can be connected in total. 60 network port units. In addition, the host computer has 4 channels of 8-core microphone unit interfaces, each channel supports 30 units, and 120 units can be connected.

A single controller can connect up to 256 conference units through the extended power supply. If you need to connect more conference units, you can also extend the hosts through cascading conferences. A conference system can connect up to 1200 conference units.

The system can connect up to 16 chairman units, and the chairman unit is not limited by the speaking mode and the number of speakers.

4.1.2 Connecting cables of conference unit

This series of conference units adopts a hand-in-hand connection method, which makes the installation of all systems simple and quick.

When the 8-PIN interface speaking unit is connected to another conference unit, it is only necessary to connect the horizontal male end of the 8-PIN T-shaped cable equipped with an -PIN T-shaped female connector to each other.

When connecting the speech list of the network cable interface to another conference unit, you only need to connect two network cables and connect them in a hand-in-hand manner.

4.1.3 Extension cable of conference unit


If the distance between the conference unit and the main controller or between the conference units exceeds the length of the standard cable, an extension cable needs to be added between the unit and the main controller or between the units. Since the extension cable consumes power, adding an extension cable will reduce the number of conference units that the controller can connect to. The relationship between the number of conference units that can be connected to the output port of each conference unit and the length of the extension cable is shown in Table 5.0

The extension cable is added between the conference system controller and the first conference unit. The extension cable consumes the largest current and has the greatest impact on the host's load capacity; and between the last two conference units, it hardly affects the connection of the host the number of conference units. For example, you can add an 80-meter extension cable between the 28th and 29th conference units, and it will not affect the number of conference units that the host can connect to.

The extension cable length between the controller and the first conference Unit connected to the socket	The number of speaking units that can be connected to the output port of each unit of the controller	
	8-PIN interface-numbers of conference speaking units	RJ45 interface-number of conference speaking units
20m	30	20
40m	28	15
60m	25	10
80m	20	5
100m	15	/

Table 5.0 Quick lookup table of controller load capability (each outlet)

4.2 Connection between the controller and the conference unit

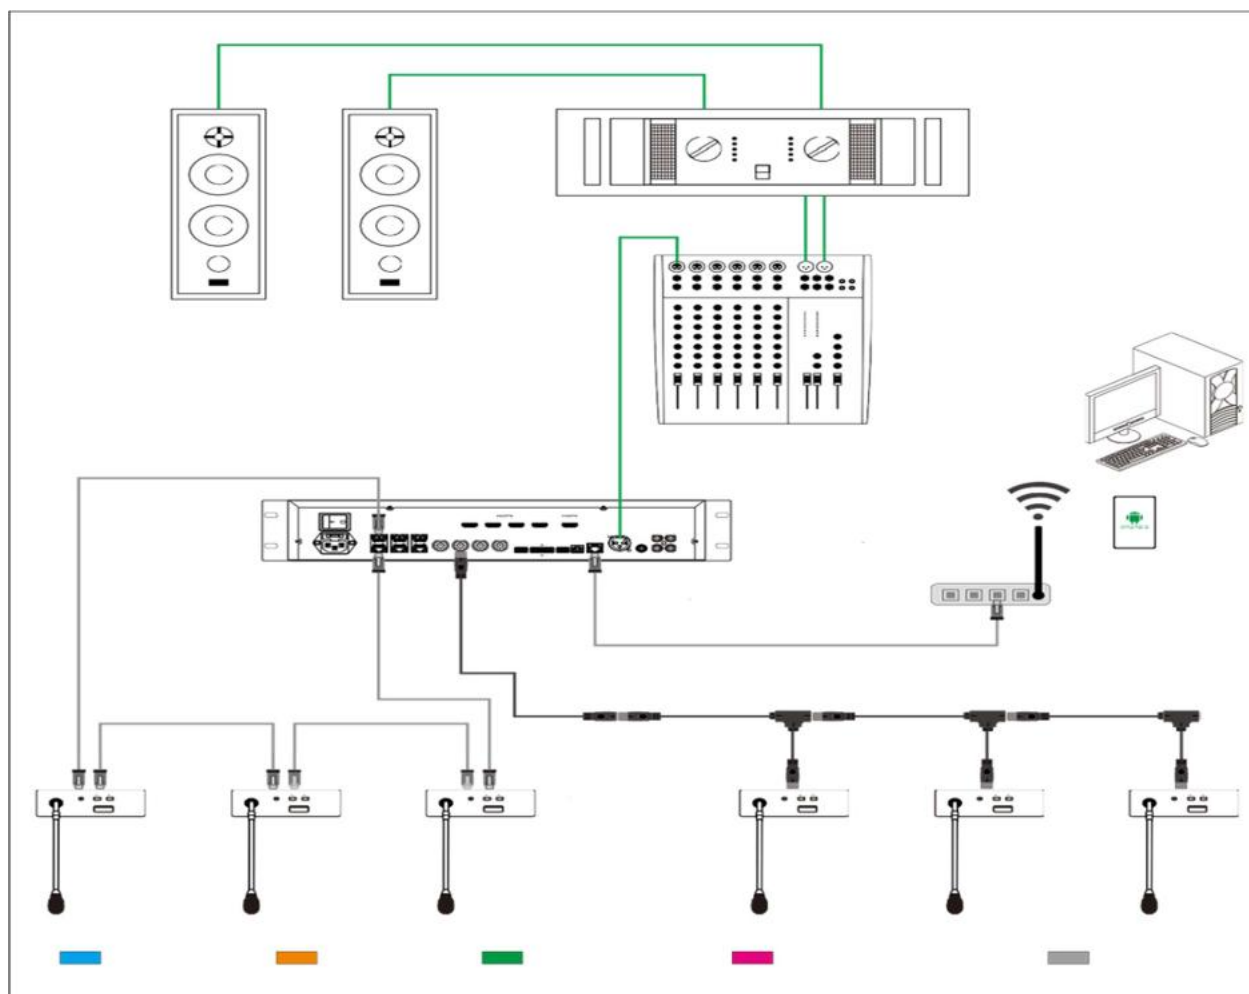

4.3 Connection with camera

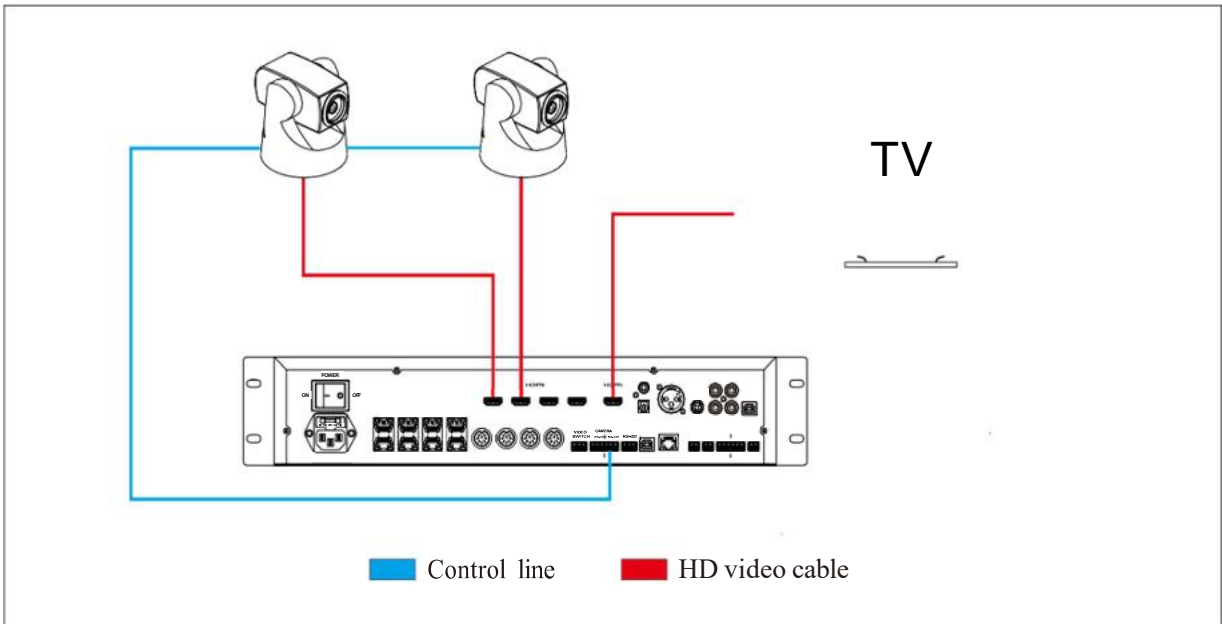


Figure 5.2 Connection with camera

Connection method	Drawing
232	Controller RS-232 RS-485 Camera IN OUT RS-232C G Tx Rx G A B Diagram showing RS-232C connection between Controller and Camera. The Controller has pins G, Tx, Rx, G, A, B. The Camera has IN and OUT ports. Connections: Tx to IN, Rx to OUT, G to G.
485	Controller RS-232 RS-485 Camera RS-485 G Tx Rx G A B Diagram showing RS-485 connection between Controller and Camera. The Controller has pins G, Tx, Rx, G, A, B. The Camera has pins G, A, B. Connections: Tx to A, Rx to B, G to G.

Figure 5.3 Communication connection between the controller and the camera

Chapter 6 Working environment and maintenance

Suitable working environment and proper maintenance methods can extend service life of the equipment effectively. For maintenance, please read the contents of this section carefully.

6.1 Public areas

In public areas ensure that the cables attached to the system units, including extension cables, are run and laid out in a neat and tidy manner where they do not interfere and hinder public walk ways.

It is recommended that the chairman unit and the interpreter units are connected at the beginning of a trunk line and not at the end. In public areas where connectors and cables could be trampled on, it is strongly suggested to use protective covers according to the existing protection specifications.

Due to the directivity of the microphone used in the discussion units, every speaker should face the microphone at a convenient distance when speaking, to achieve both best audibility and intelligibility.

6.2 Technical rooms

1. Ensure that the area is a dust-free environment.
2. Ensure adequate ventilation.
3. Ensure adequate lighting. But be sure that the lighting does not impede the operator in the control room and the normal system operation.
4. Do not place objects on the top of units. They could fall into vents or could cover them and thus prevent proper cooling of electronic components inside the units. By falling into a unit, objects could cause trouble such as fire and electric shock.
5. To avoid the risk of shock or permanent damage to the system units, do not expose units to rain or moisture.
6. Do not attempt to remove the top cover of the system main units as you will be exposed to a shock hazard. The covers should only be removed by qualified service personnel. If any repair or maintenance is required, contact the service center in your region.
7. Equipment is only for indoor use. Do not expose it to sunlight.

WARNING: Damage to the power cable may cause fire or a shock hazard!

6.3 System operator room

In a PC based system, the operator needs a dedicated room to operate the PC and to manage the congress procedure. Generally, the demands on the operator room are the same as on the

interpreter booth. By means of a microphone system, the operator should also be connected to a public-address system to remind the participants of operations, such as voting, signing-in, etc.

Chapter 7 Technical specifications

7.1 System specifications

System performance

Conforms to IEC 60914, the international standard for congress systems

System environmental conditions

Working conditions: fixed/stationary/transportable

Temperature range:

-Transport: -40 °C to +70 °C

-Operating: 0 °C to +45 °C

Max. relative humidity: < 95% (not condensing)

Safety: Compliant to EN 60065

EMC emission: Compliant with EN 55022

EMC immunity: Compliant with EN 55024

EMC approvals: CE, FCC

Power harmonic: Compliant with EN 61000-3-2

Voltage fluctuations and flicker: Compliant with EN 61000-3-3